

order number: L00005D0038

Patch Cord Cat.5e MP8 FS 100 LSZH-10,0 m, blue

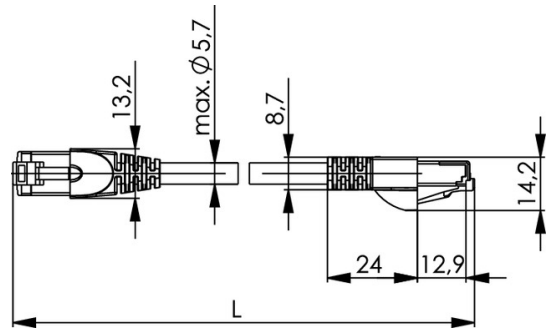


Fig. may differ

Technical Attributes	
Short name	MP8 FS 100 LSZH-10,0
Length	10 m
Colour	blue

### Performance Characteristics

- pin assignment acc. to EIA/TIA 568B
- 360 degrees completely surround plug shielding (shielded cable types)
- flexible and strain relieved
- moulded strain relief boot

Mechanical Characteristics	
Cable structure	Li2Y(ST)H 4x2xAWG 26/7
Jacket diameter	5.5 (±0.2 mm)
Life (mating cycles RJ45, RJ12, RJ11)	≥ 750
Stranded wire	AWG 26 (7/0.16mm)
Insulation	PE, Ø 0.92 mm (±0.05 mm)
Overall shielding	Al-foil, inside conducting

Climatic Characteristics	

flame-retardant test	IEC 60332-1
Operating temperature in °C	-20° C to 60° C

Electrical Characteristics	
PoE+ acc to IEEE 802.3at	Adequate for Power over Ethernet+
Current carrying capacity at 50°C	1 A

Standards	
Connectors	IEC 60603-7-3

Gigabit Ethernet acc. to IEEE 802.3	Adequate for Gigabit Ethernet